
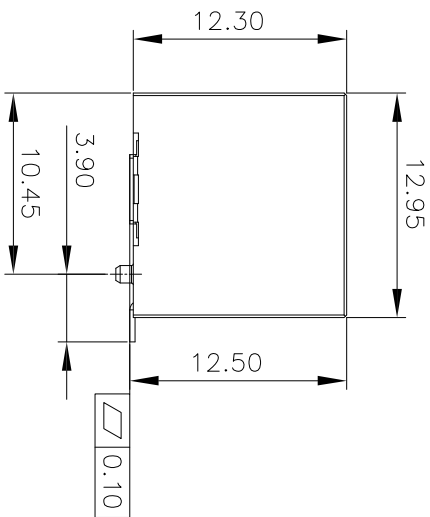


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 SMT TYPE H12.5 全塑无灯	MJ56881-XX11-HXRN1-X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A04	—	增加主体颜色选项	LXY	2020.03.26
A05	—	增加主体颜色选项	ZSH	2021.01.08



- Specifications:
1. Rated Current: 1.5A
 2. Contact resistance: 40mΩ MAX.
 3. Insulation resistance: 500MΩ MIN.
 4. Dielectric withstand: 500V AC for 1 minute
 5. Operating temperature: -40℃~+80℃
 6. Insertion/Extraction life: 750 Cycles
 7. To Conform to the "RoHS Directive"
 8. Resistance to reflow Soldering Heat 260℃ 10 Seconds


MJ56881-XX11-HXRN1-X

X	Housing Color
B	Black
U	Blue CX018
Y	Yellow T14C
G	GRAY 1C
G1	Gray 7035

X	Housing Material
L	LCP UL94V-0
8	PA8T UL94V-0

X	包装方式
C	自粘卷带包装
P	吸塑包装
C1	热封卷带包装

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

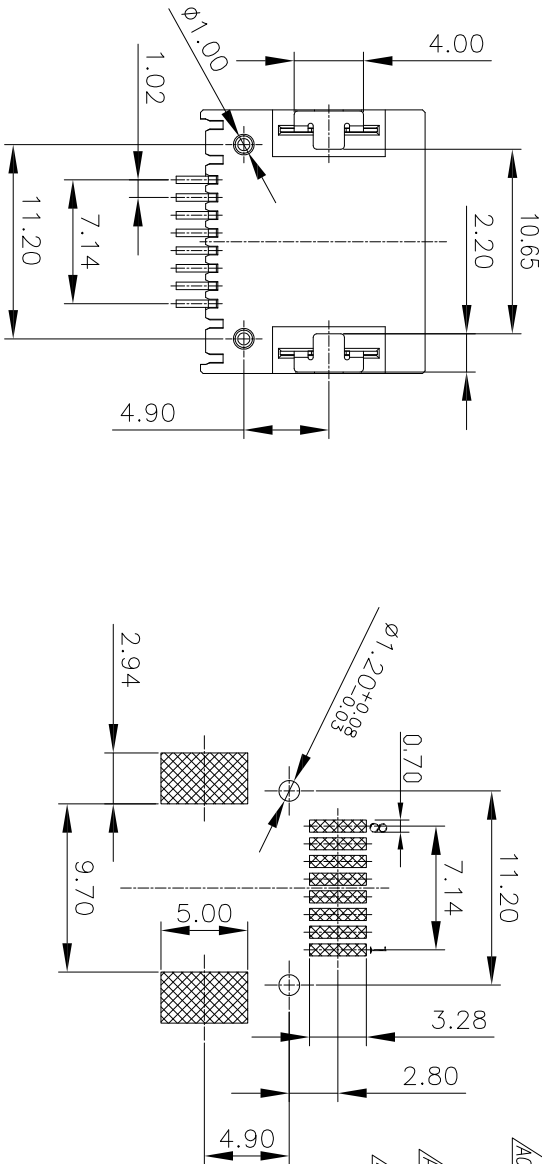

c	Stator	2	Copper Alloy T=0.20mm	Ni Plating	
b	Terminal	8	Phosphor Bronze T=0.30mm	Au/Matte-Tin Plating	
a	Housing	1	SEE TABLE	SEE TABLE	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	
DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	
X.XXX :±0.1	

東莞市合陵電子有限公司
DongGuan Heling Electronic Co.,LTD

SCALE:1/1	UNIT: mm	DWG.NO:
SIZE: A3	PAGE:1 OF 1	REV:A05
APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	LXY
CUSTOMER COPY		