


4	3	2
CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C SMT H11.5 全塑	MJ88-XX11-JRNS7-X

1	2	3	4	5
REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	YST	2021.06.30

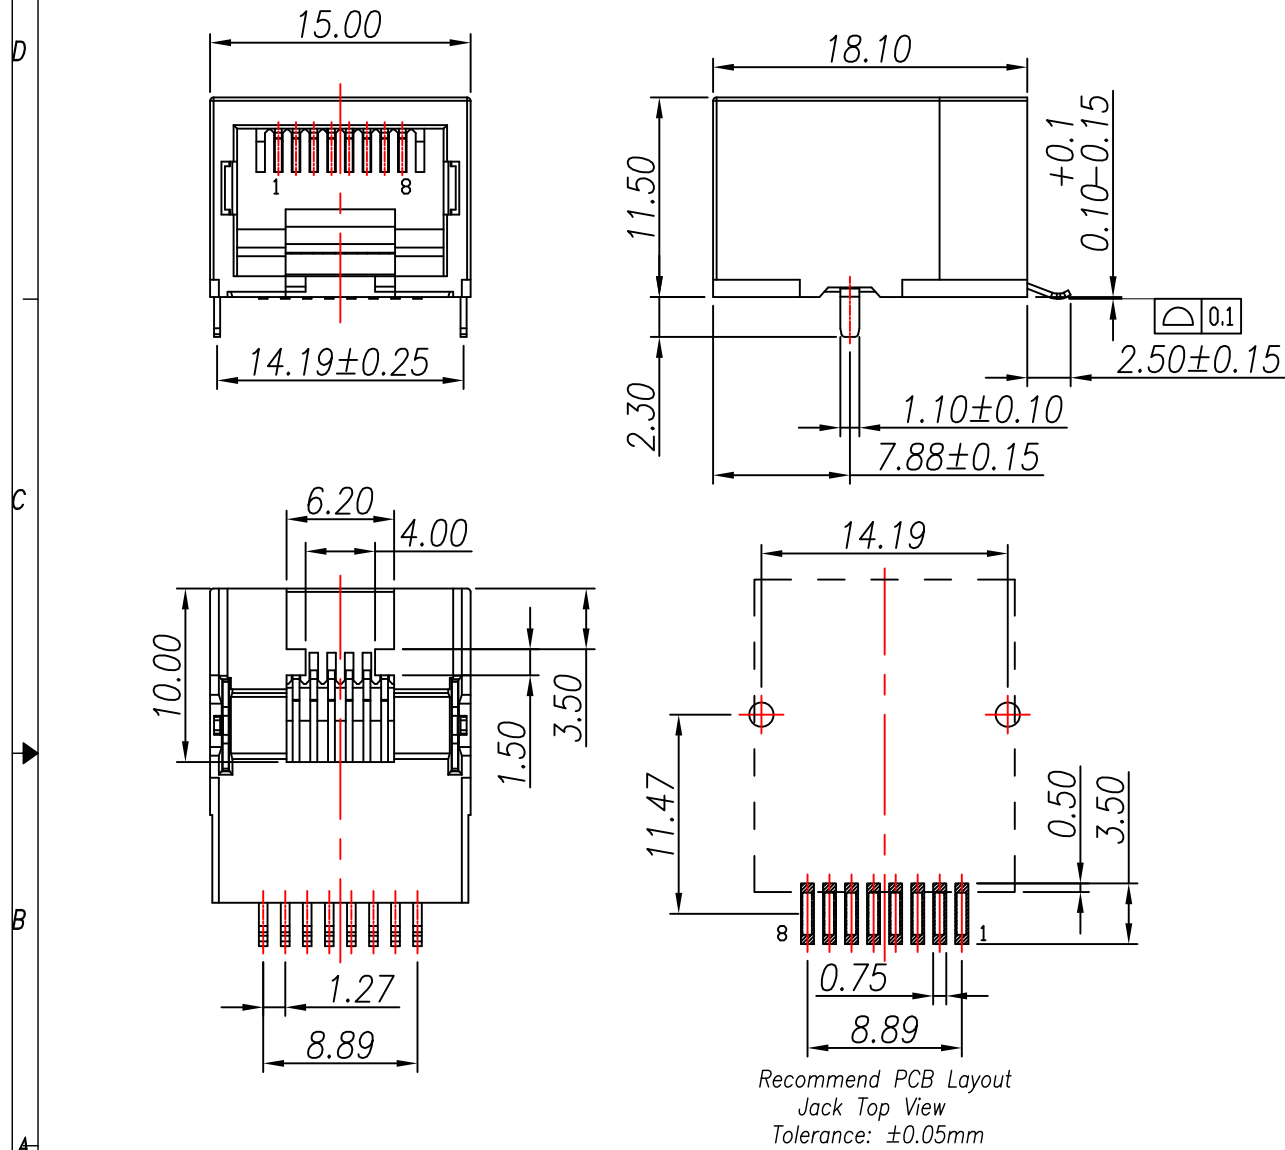

SPECIFICATIONS:

1. Voltage: 125V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 40mΩ MAX.
4. Insulation Resistance: 1000MΩ MIN.
5. Dielectric Withstang Voltage :500V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 750 Mating Cycles MIN.

MJ88-XX11-JRNS7-X

Table1

X	Housing Color
B	BLACK

X	包装方式
P	吸塑包装
C	载带包装

Table2

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

d	ME	2	COPPER ALLOY T=0.35mm	Ni PLATING	
c	INSERT	1	HIGH TEMPERATURE PLASTIC UL94V-0	SEE TABLE1	
b	TERMINAL	8	PHOSPHOR BRONZE T=0.30MM	Au/Tin PLATING	
a	HOUSING	1	HIGH TEMPERATURE PLASTIC UL94V-0	SEE TABLE1	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:		
	SIZE: A3	PAGE:1 OF 1	REV:A01		
	DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1°	APPROVED BY	CHECKED BY	PREPARED BY
	DICK	XSY		YST	
CUSTOMER COPY					