
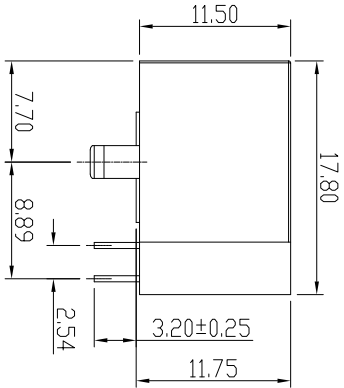


4		3		2		1		
CATEGORY	DESCRIPTION	P/N #		REV.	ECN NO	DESCRIPTION	REVISED	DATE
CONNECTOR	RJ45 8P8C全塑1x4	MJ5608-XX14-HRN2		A01	————	New Release	Tony	2017.08.01

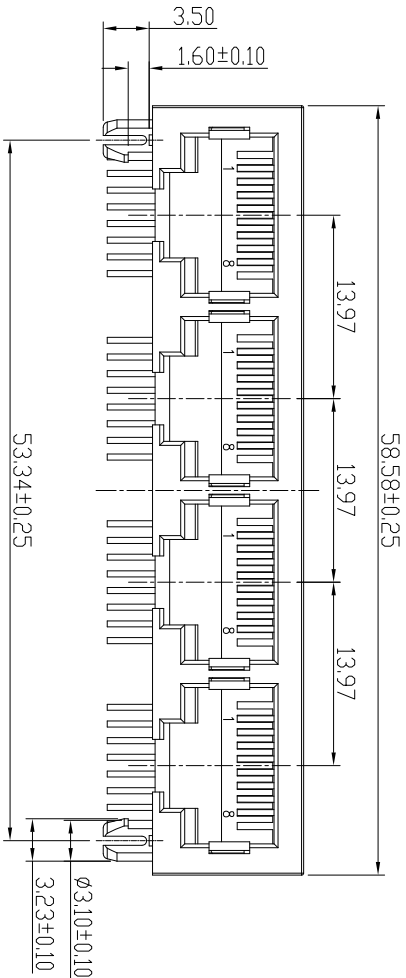

- SPECIFICATION
- VOLTAGE RATING: 150 VAC RMS.
 - CURRENT RATING: 1.5 A
 - CONTACT RESISTANCE: 40 mΩ MAX
 - INSULATION RESISTANCE: 500MΩ MIN.
 - WITHSTAND VOLTAGE: AC1000V RMS
 - OPERATURE TEMPERATURE: -40°C~+80°C
 - DURABILITY: 750 MATING CYCLES MIN


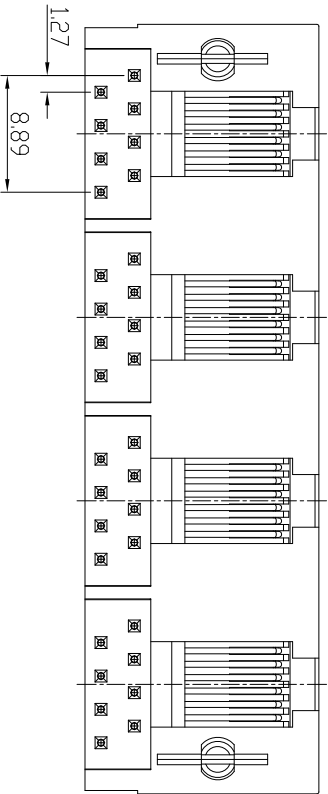


TABLE 1

X	PART COLOR
B	BLACK
Y	YELLOW 115C
L	Blue
G	Grey 7544C

X	Terminal Plating
0	G/F Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

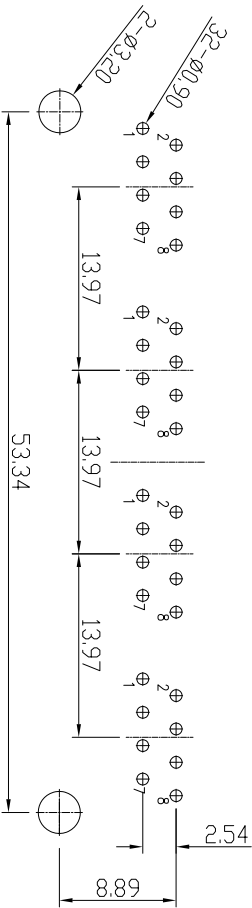

Recommend PCB Layout
(lack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

c	TERMINAL	32	PHOSPHOR BRONZE Ø0.46	Au PLATING	
b	INSERT	4	PBT UL94V-0	TABLE 1	
a	HOUSING	1	PBT UL94V-0	TABLE 1	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3	PAGE:1 OF 1	REV:A01

X	:±0.5	X	:±2
X.X	:±0.3	X.X	:±1°
X.XX	:±0.2		

东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD

APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	XSY

CUSTOMER COPY