
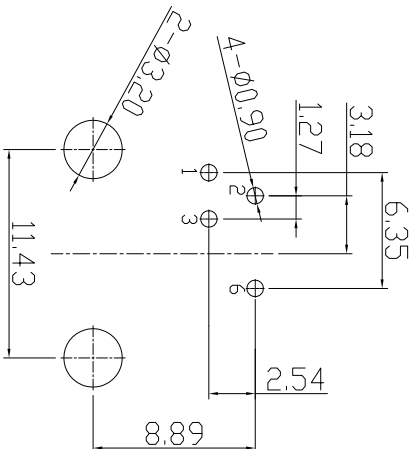
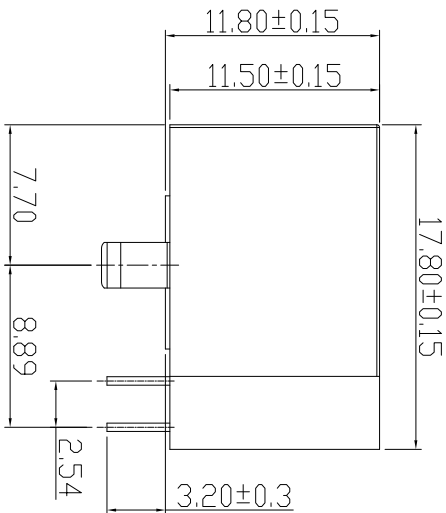


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 全塑1x1	MJ562204-XX11-RN1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A02	——	增加颜色编码	XSY	2016.05.18
A03	——	增加颜色编码	FHF	2016.12.27
A04	——	增加颜色编码	XSY	2017.12.28

SPECIFICATION

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40 mΩ MAX
4. INSULATION RESISTANCE: 500MΩ MIN.
5. WITHSTAND VOLTAGE: AC1000V RMS 60S.
6. OPERATING TEMPERATURE: -40°C~+80°C

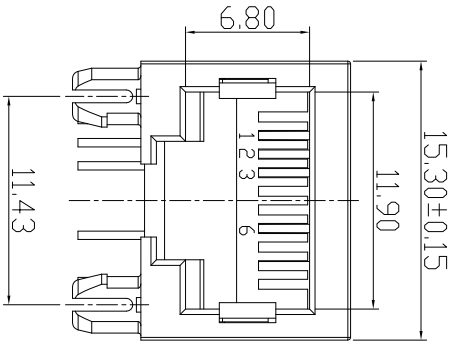

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

MJ562204-XX11-RN1

TABLE 1


X	HOUSING COLOR
B	BLACK
Y	YELLOW
L	BLUE (306C)
G	GRAY

Recommend PCB Layout

(Jack Top View)

Tolerance: ±0.05mm

Recommend PCB Thickness: 1.6mm

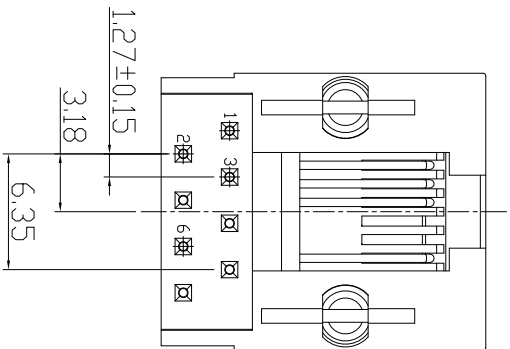

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	TERMINAL	4	PHOSPHOR BRONZE	Ø0.46mm	
b	INSERT	1	PBT UL94V-0	SEE TABLE 1	
a	HOUSING	1	PBT UL94V-0	SEE TABE 1	

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1°	SIZE: A3	PAGE:1 OF 1
APPROVED BY		CHECKED BY	PREPARED BY
DICK		XSY	XSY

东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD

CUSTOMER COPY