


4		3		2		1		
CATEGORY	DESCRIPTION	P/N #		REV.	ECN NO	DESCRIPTION	REVISED	DATE
				A01	—	New Release	XSY	2017.02.13
CONNECTOR	RJ45 沉板H2.8无灯加长型	MJ81B-BX11-HRV1-X						







MJ81B-BX11-HRV1-X

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

X	Packing
C	卷带包装
P	吸塑包装

SPECIFICATION

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40 mΩ MAX
4. INSULATION RESISTANCE: 500MΩ MIN.
5. WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
6. OPERATING TEMPERATURE: -40°C~+80°C

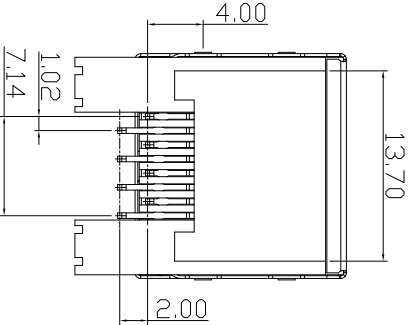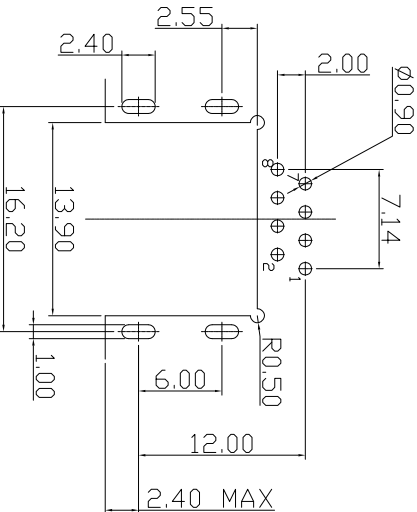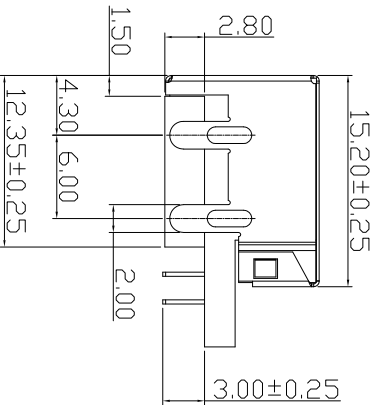

Recommend PCB Layout

(Jack Top View)

Tolerance: ±0.05mm

Recommend PCB Thickness: 1.6mm

d	SHELL	1	BRASS T=0.2mm	Ni PALTING	
c	TERMINAL	8	PHOSPHOR BRONZE T=0.3mm	Au PALTING	
a	HOUSING	1	LCP UL94V-0	BLACK	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES			SCALE:1/1 UNIT: mm			DWG.NO:		
DECIMALS:	ANGLES:		SIZE: A3	PAGE:1 OF 1	REV:A01	APPROVED BY	CHECKED BY	PREPARED BY
X :±0.5	X :±2°							
X.X :±0.3	X.X :±1°							
X.XX :±0.2								


东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD

CUSTOMER COPY