

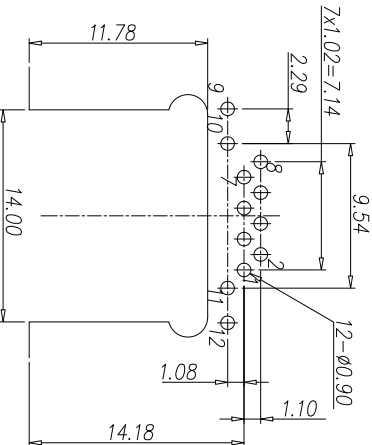





CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C 全塑压板带灯	MJ88B-BX11-HRVNLXX

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	XSY	2015.10.12
A02	ECN180704004	修改塑胶主体, 改善塑胶壁强度	XSY	2018.07.04

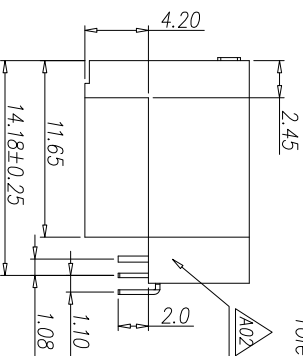

Recommend PCB layout
(Jlack Top View)
Tolerance: ±0.05mm

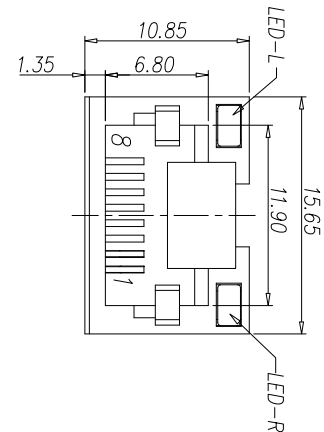

d	LED-R	1	See Table 1	Tin Plating
c	LED-L	1	See Table 1	Tin Plating
b	Terminal	8	Phosphor Bronze, T=0.3mm	Au/Tin Plating
a	Housing	1	LCP UL94V-0	Black
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1	UNIT: mm	DWG.NO:	
DECIMALS: ANGLES:		SIZE: A3			
X : ±0.5 X : ±2°		PAGE: 1 OF 1			
X.X : ±0.3 X.X : ±1°		REV: A02			
X.XX : ±0.2		APPROVED BY			
		CHECKED BY			
		DICK XSY			
		PREPARED BY			
		XSY			
		CUSTOMER COPY			

东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

X	LED TYPE	LED-L	LED-R
1	LED 塑胶主体透明白色		
2	LED 塑胶主体透明带颜色区分	Yellow	Green
3	LED 塑胶主体透明带颜色区分	Green	Yellow

Table 1

X	包装方式
C	卷带包装

MJ88B-BX11-HRVNLXX

- SPECIFICATIONS:
1. RJ Electrical Characteristics
 - 1-1: Voltage: 150V AC RMS
 - 1-2: Current Rating: 1.5A
 - 1-3: Contact Resistance: 40mΩ MAX.
 - 1-4: Insulation Resistance: 500MΩ MIN.
 - 1-5: Dielectric Withstand Voltage :1000V AC
 - 1-6: Operature Temperature: -40℃~80℃