


4		1	3	2					1	1
CATEGORY	DESCRIPTION	P/N #								
CONNECTOR	RJ45 沉板4.2带壳带灯 HF（正口）	MJ88B2-BX11-HLRVLX1-X								
REV.	ECN NO	DESCRIPTION	REVISED	DATE						
A01	_____	New Release	XSY	2017.11.27						

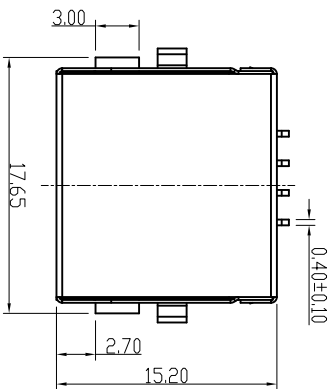

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

X	LED-L	LED-R
1	Green	Yellow
2	Yellow	Green




X	包装方式
C	卷带包装
P	吸塑包装

MJ88B2-BX11-HLRVLX1-X


SPECIFICATIONS:

1. RJ Electrical Characteristics

- 1-1: Voltage: 150V AC RMS
- 1-2: Current Rating: 1.5A
- 1-3: Contact Resistance: 40mΩ MAX.
- 1-4: Insulation Resistance: 500MΩ MIN.
- 1-5: Dielectric Withstand Voltage :1000V AC
- 1-6: Operature Temperature: -40℃~80℃

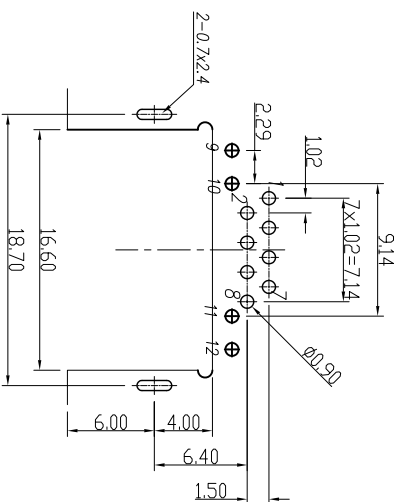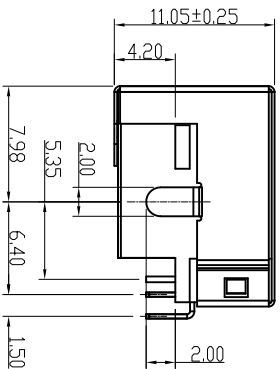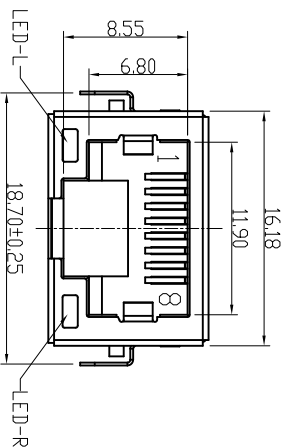

Recommend PCB Layout
(lack Top View)
Tolerance: ±0.05mm

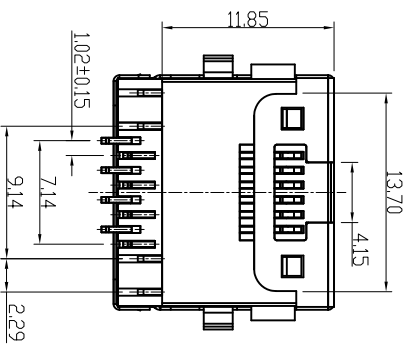

A		B		C		D	
e	LED-R(HF)	1	SEE TABLE	UNLESS OTHERWISE SPECIFIED TOLERANCES			
d	LED-L(HF)	1	SEE TABLE				
c	Shielding	1	Brass, T=0.2mm				
b	Terminal	8	Phosphor Bronze, T=0.3mm				
a	Housing	1	LCP UL94V-0				
NO.	PART NAME	QTY	MATERIAL				
PLATING & COLOR							
DECIMALS:				ANGLES:			
X : ±0.5				X : ±2°			
X.X : ±0.3				X.X : ±1°			
X.XX : ±0.2							
		SCALE:1/1		UNIT: mm		DWG.NO:	
		SIZE: A3		PAGE:1 OF 1		REV: A01	
		APPROVED BY		CHECKED BY		PREPARED BY	
		DICK		XSY		XHY	
						CUSTOMER COPY	

東莞市合陵電子有限公司

Connector DongGuan Heling Electronic Co.,LTD