


4		3		2		1	
CATEGORY	DESCRIPTION	P/N #					
CONNECTOR	RJ45 沉板4.2 带壳带灯（正口）左单灯	MJ88B2-BX11-HLRVXA-X					
			REV.	ECN NO	DESCRIPTION	REVISED	DATE
			A01	_____	New Release	XSY	2017.11.27

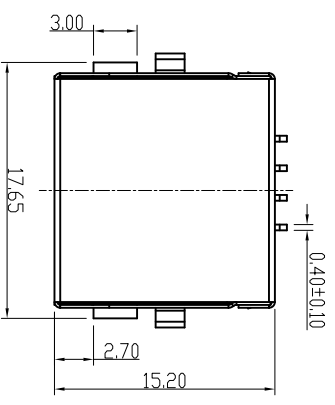

MJ88B2-BX11-HLRVXA-X	
X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

X	包装方式
C	卷带包装
P	吸塑包装

X	LED-L
1	Green
2	Yellow

SPECIFICATIONS:

1. RJ Electrical Characteristics

1-1: Voltage: 150V AC RMS






1-2: Current Rating: 1.5A

1-3: Contact Resistance: 40mΩ MAX.

1-4: Insulation Resistance: 500MΩ MIN.

1-5: Dielectric Withstand Voltage :1000V AC

1-6: Operature Temperature: -40℃~80℃

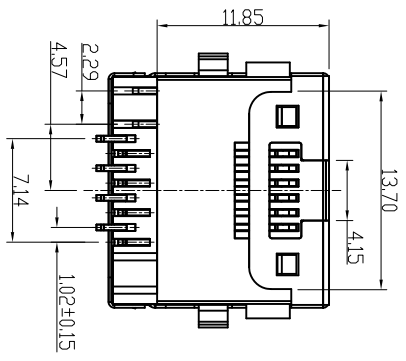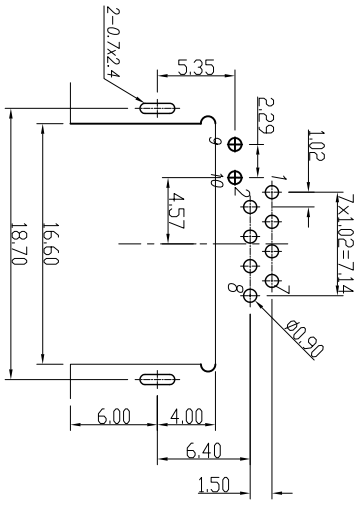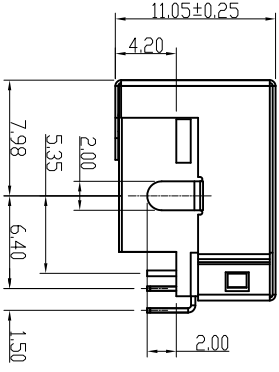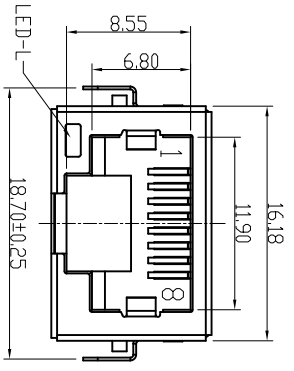

Recommend PCB Layout
(lack Top View)
Tolerance: ±0.05mm

d	LED-L	1	SEE TABLE	Tin Plating	UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
c	Shielding	1	Brass, T=0.2mm	Ni Plating	DECIMALS: X :±0.5 X :±2° X.X :±0.3 X.X :±1° X.XX :±0.2	SIZE: A3	PAGE:1 OF 1	REV: A01
b	Terminal	8	Phosphor Bronze, T=0.3mm	Au/Tin Plating	APPROVED BY	CHECKED BY	PREPARED BY	
a	Housing	1	LCP UL94V-0	Black	DICK	XSY	XHY	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	CUSTOMER COPY			

東莞市合陵電子有限公司

Connector DongGuan Heling Electronic Co.,LTD