

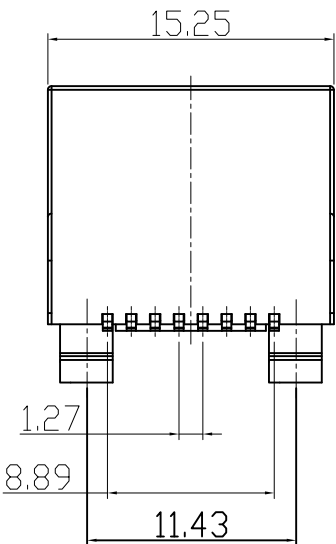


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 180度SMT全塑前插后贴	MJ882-BX11-H9PSN2

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	新增图面	XSY	2015.09.15

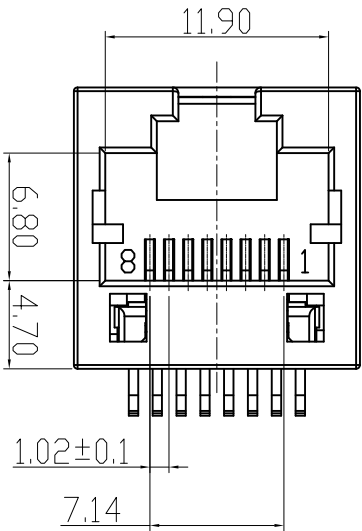


- SPECIFICATION
- VOLTAGE RATING: 125 VAC RMS.
 - CURRENT RATING: 1.5 AMP
 - CONTACT RESISTANCE: 40 mΩ MAX
 - INSULATION RESISTANCE: 500MΩ MIN.
 - WITHSTAND VOLTAGE: AC1000V RMS 50Hz or 60Hz MIN.
 - OPERATING TEMPERATURE: -40°C~+80°C

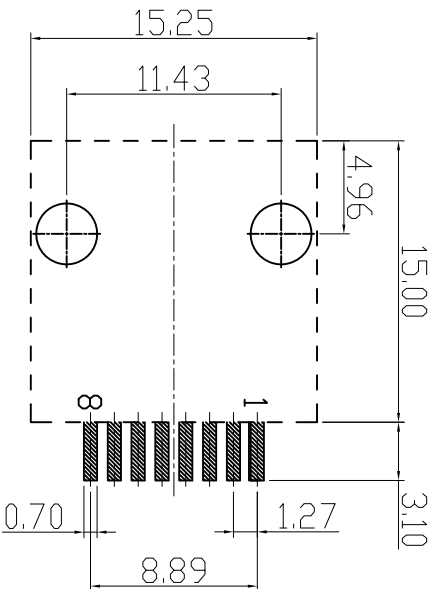

MJ882-BX11-H9PSN2

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

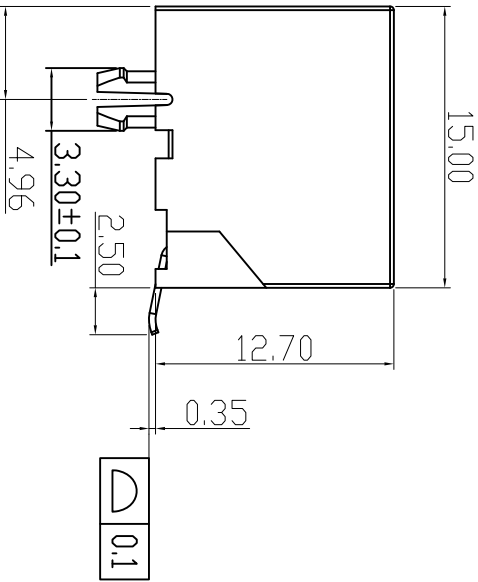

TERMINAL	8	PHOSPHOR BRONZE T=0.35mm	Au/Tin PLATING
INSERT	1	LCP UL94V-0	BLACK
HOUSING	1	LCP UL94V-0	BLACK
PART NAME	Q1TY	MATERIAL	PLATING & COLOR
NO.			Remark

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

SCALE: 1/1	UNIT: mm	SIZE: A3	PAGE: 1 OF 1	REV: A01	DWG. NO:
APPROVED BY					
CHECKED BY					
PREPARED BY					



东莞市合陵电子有限公司
DongGuan Heling Electronic Co., LTD

CUSTOMER COPY