
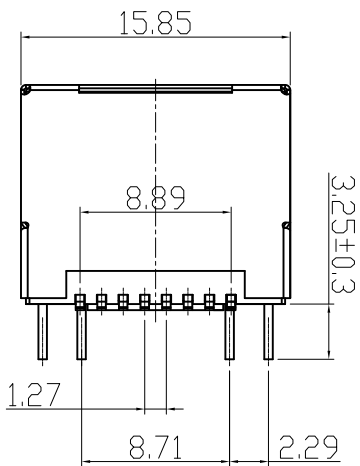




4		3		2		1		
CATEGORY	DESCRIPTION	P/N #		REV.	ECN NO	DESCRIPTION	REVISED	DATE
CONNECTOR	RJ45 180度SMT带壳带灯(麦拉款)	MJ882-BX11-H9PSLX2-X		A01	————	New Release	XSX	2015.09.15

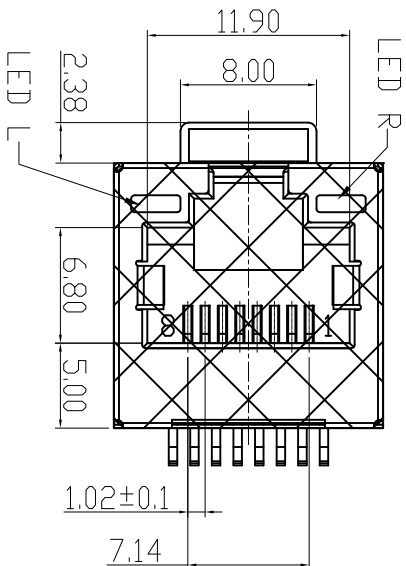

MJ882-BX11-H9PSLX2-X

TABLE 1			
X	LED-L	LED-R	
1	GREEN	YELLOW	
2	YELLOW	GREEN	
4	GREEN/ORANGE	YELLOW	
5	YELLOW	GREEN/ORANGE	
A	GREEN	GREEN/ORANGE	


X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

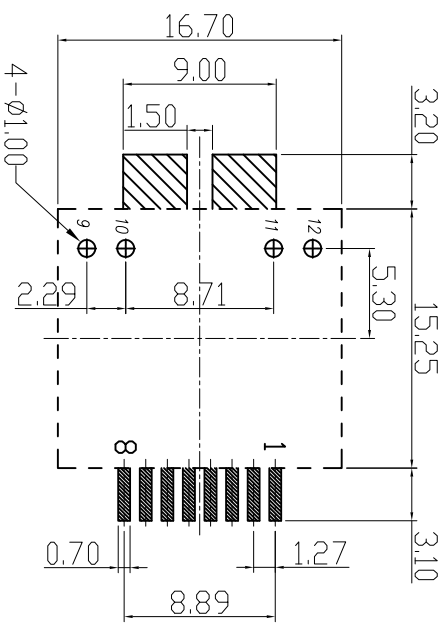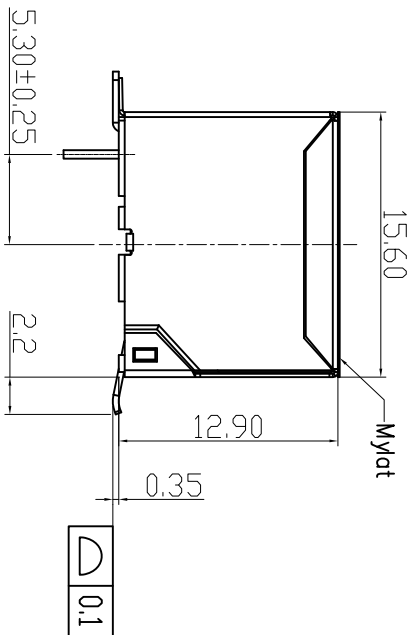

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

- SPECIFICATION
- VOLTAGE RATING: 125 VAC RMS.
 - CURRENT RATING: 1.5 AMP
 - CONTACT RESISTANCE: 40 mΩ MAX
 - INSULATION RESISTANCE: 500MΩ MIN.
 - WITHSTAND VOLTAGE: AC1000V RMS 50Hz or 60Hz MIN.
 - OPERATING TEMPERATURE: -40℃~+80℃

g	LED-R	1	See Table 1	Tin PLATING	
f	LED-L	1	See Table 1	Tin PLATING	
e	SHELL	1	BRASS T=0.2mm	Ni PLATING	
d	ME	1	BRASS T=0.35mm	Tin PLATING	
c	TERMINAL	8	PHOSPHOR BRONZE T=0.35mm	Au/Tin PLATING	
b	INSERT	1	LCP UL94V-0	BLACK	
a	HOUSING	1	PA9T UL94V-0	BLACK	
NO.	PART NAME	Q'ty	MATERIAL	PLATING & COLOR	Remark

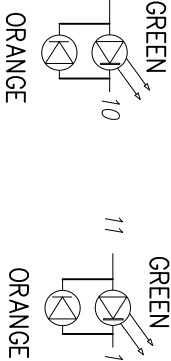

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1 UNIT: mm		DWG. NO:	
DECIMALS:	ANGLES:	SIZE: A3	PAGE: 1 OF 1	REV: A01	WI-061-150
X : ±0.5	X : ±2°	APPROVED BY	CHECKED BY	PREPARED BY	
X.X : ±0.3	X.X : ±1°	DICK	XSX	XSX	
X.XX : ±0.2		CUSTOMER COPY			

东莞市合陵电子有限公司
DongGuan Hejing Electronic Co.,LTD