

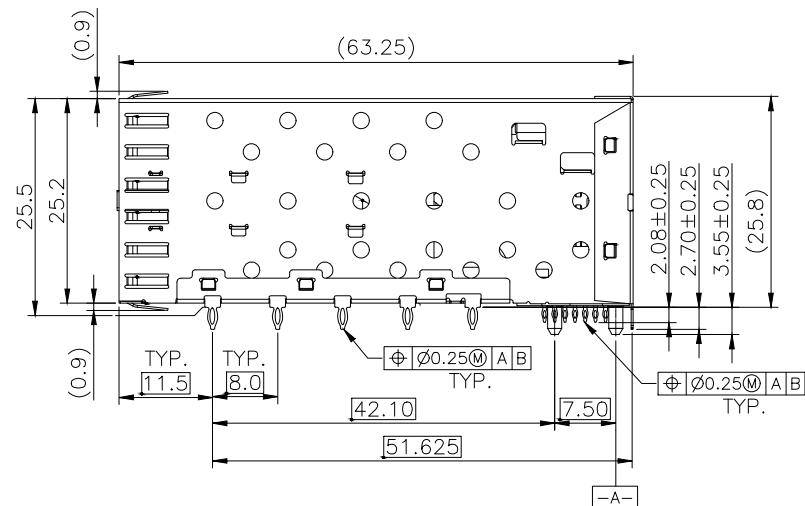



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	————	New Release	ZSH	2019.10.16



STORAGE TEMPERATURE: -55°C TO $+105^{\circ}\text{C}$

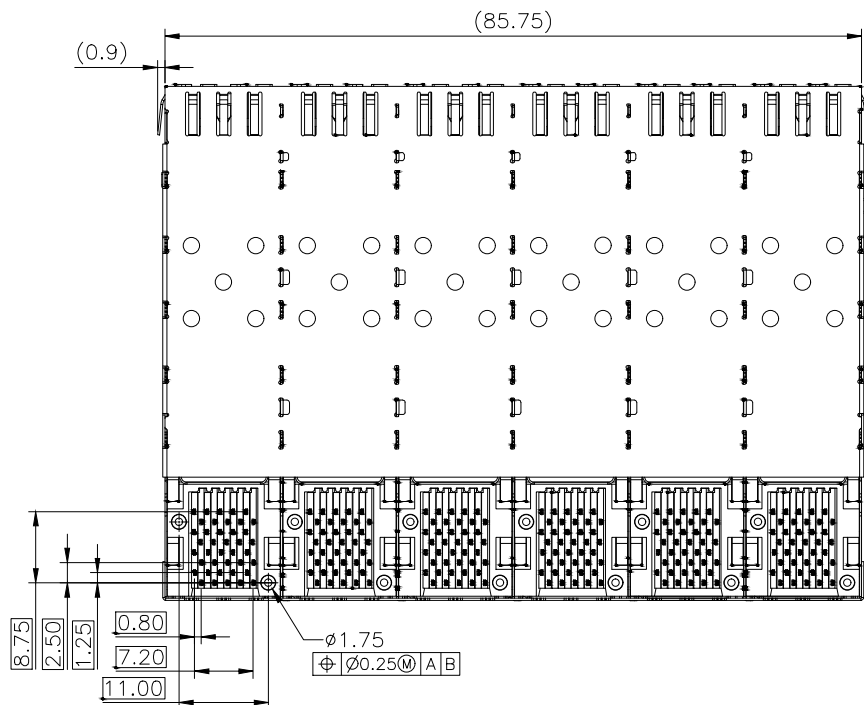


UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm		DWG.NO:
	SIZE: A3	PAGE: 1 OF 1	REV: A01	
DECIMALS:	ANGLES:	APPROVED BY	CHECKED BY	PREPARED BY
X :±0.5	X :±2°	DICK	XSY	ZSH
X.X :±0.3	X.X :±1°	CUSTOMER COPY		
X.XX :±0.2				

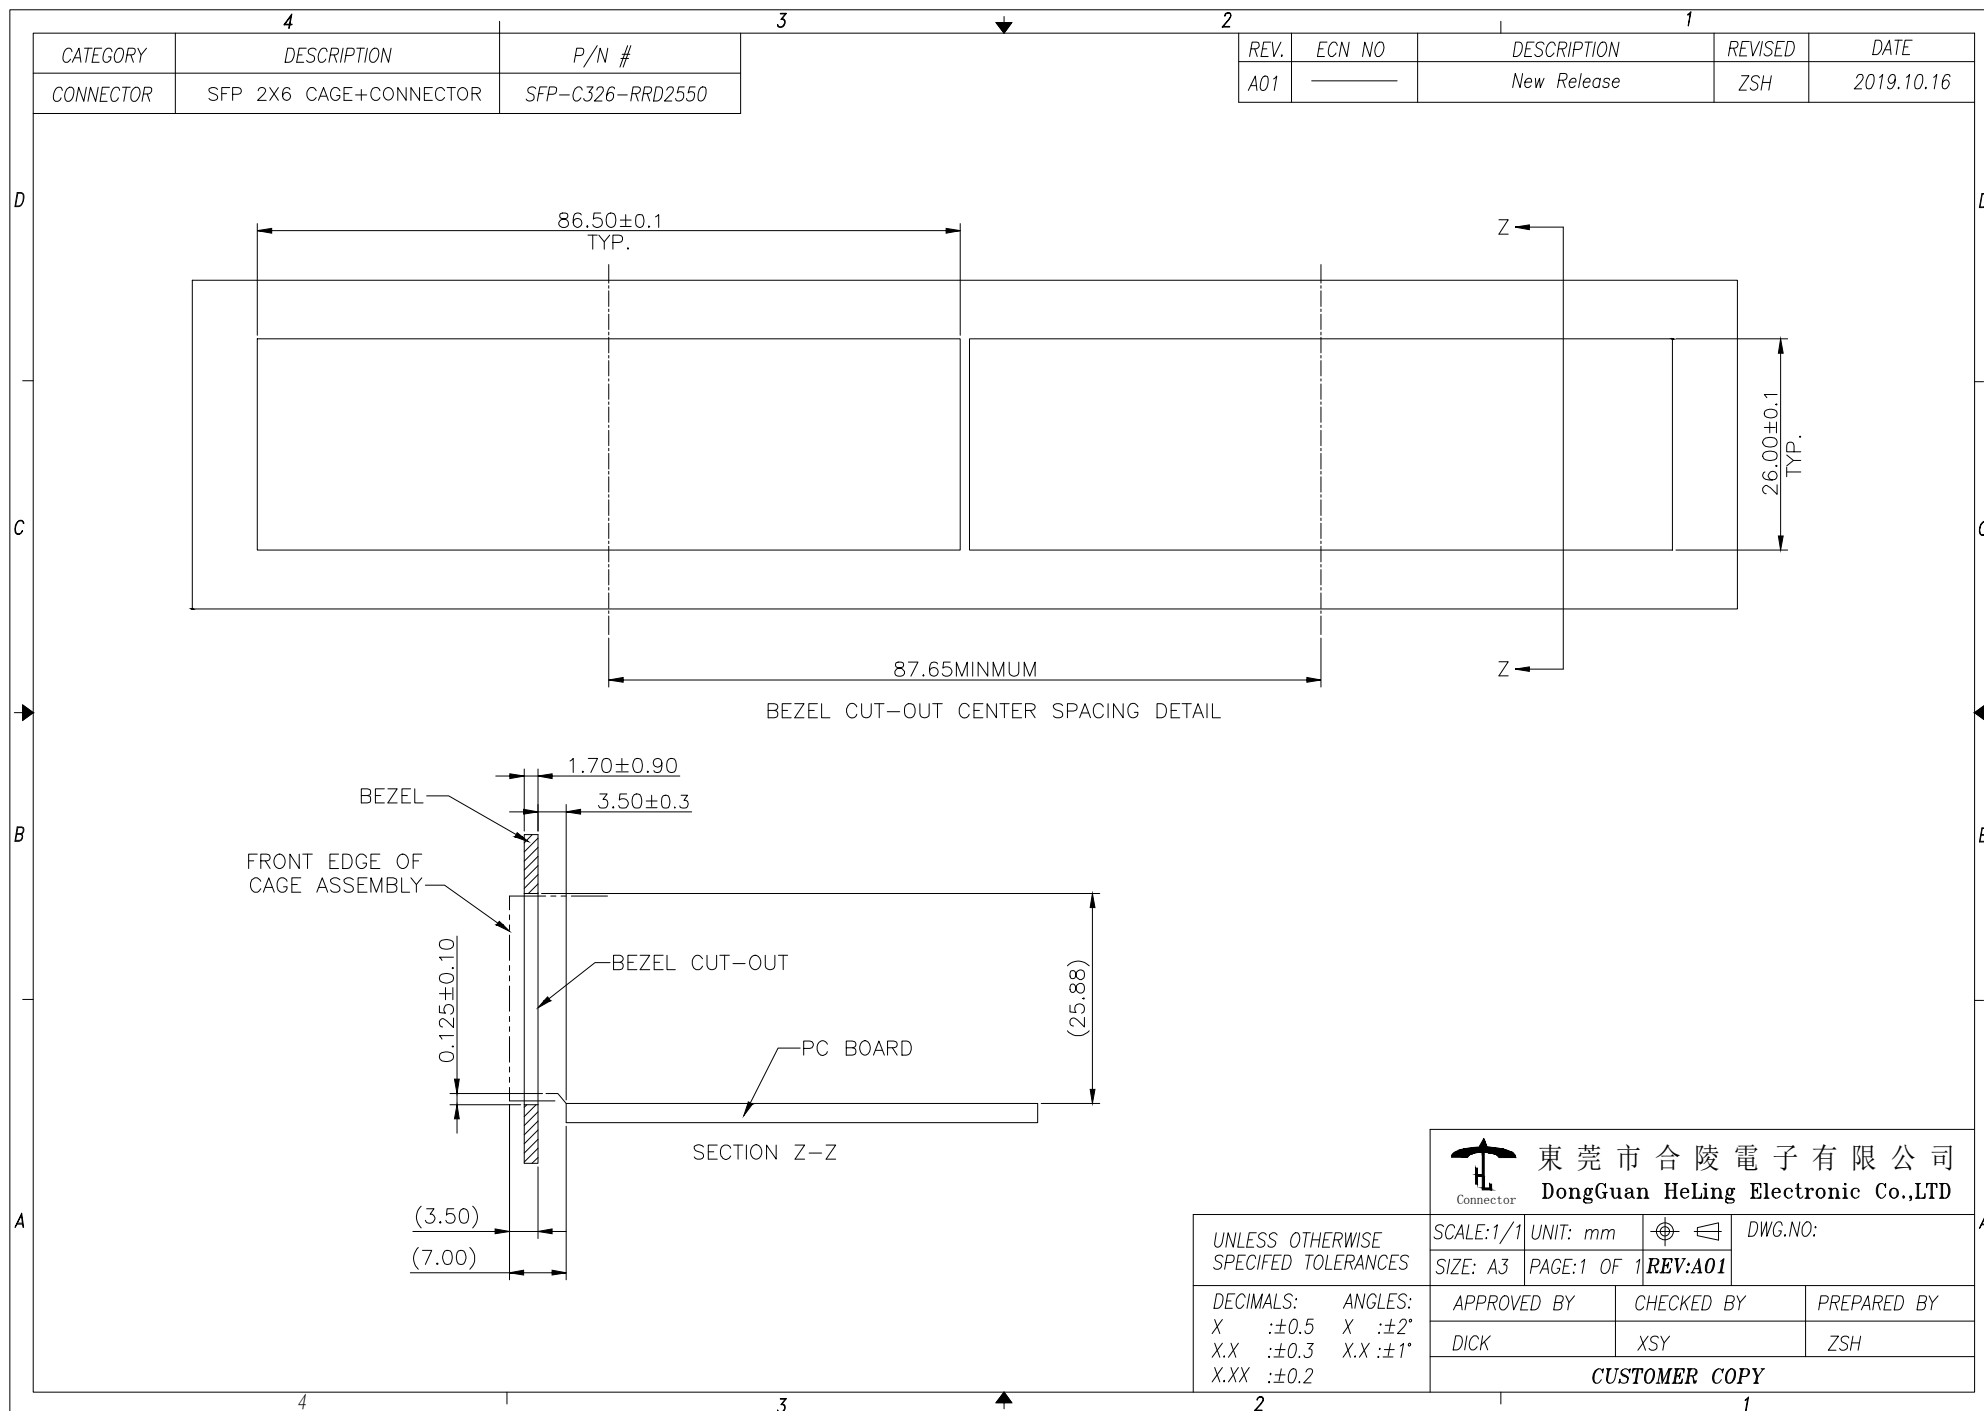


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	SFP 2X6 CAGE+CONNECTOR	SFP-C326-RRD2550

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	ZSH	2019.10.16

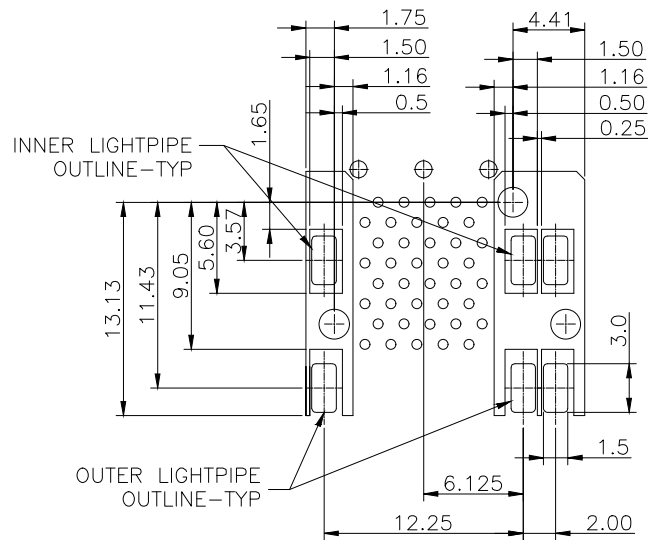

THE HATCHED AREA IN THIS VIEW INDICATES ZONES THAT ARE OCCUPIED BY THE PLASTIC HOUSING THAT SEATS AGAINST THE PCB AND BY THE VERTICAL METAL CAGE WALL THAT STOPS JUST SHORT OF THE PCB

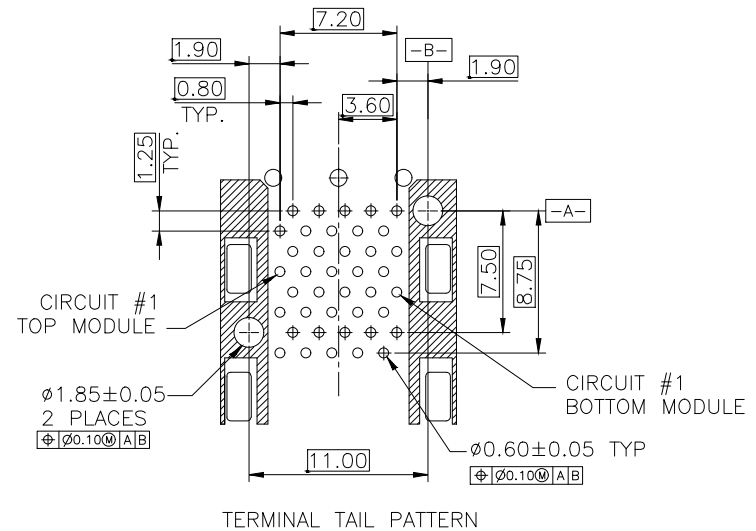

東莞市合陵電子有限公司
DongGuan HeLing Electronic Co.,LTD

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
	SIZE: A3	PAGE:1 OF 1	
DECIMALS:	ANGLES:	APPROVED BY	CHECKED BY
X :±0.5	X :±2°	DICK	XSY
X.X :±0.3	X.X :±1°		ZSH
X.XX :±0.2		CUSTOMER COPY	

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	SFP 2X6 CAGE+CONNECTOR	SFP-C326-RRD2550

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	ZSH	2019.10.16

